

MH 460/610

Table top impulse sealer

for high thickness poly bags or multilayered coated materials

According to DIN 58953-7 Standards

Impulse medical sealers for the sealing of pouches and reels conforming to DIN 58953-7:2008 standard.

Double sealing bar, sealing length mm 460 and mm 610, sealing width mm 8.

Powered by Solenoid.

User friendly machine, utmost operator safety, electronic control of both sealing and cooling times, independently adjustable.

Available in **fully Validatable** Digital Accutemp version, with complete control of all sealing parameters to guarantee the repeatability of the seal quality.

Remote Management Software allows the interface with a PC to remotely set the sealer and record functioning data, to guarantee traceability of the sealing parameters.

Records can be stored on PC and managed in Excel format. The software also allows for creating charts, which can be stored/printed as documents of Process Validation.

It can be linked to any dosing system.


Stainless steel top cover allows an easy and effective cleaning and disinfection.

Versions

- standard version
- Digital Accutemp version
- GT version
- with built-in roll holder and cutting device

Accessories upon request

- electrical foot pedal
- front support tray
- cutting device and reel holder
- seal code for values packaging with safety key

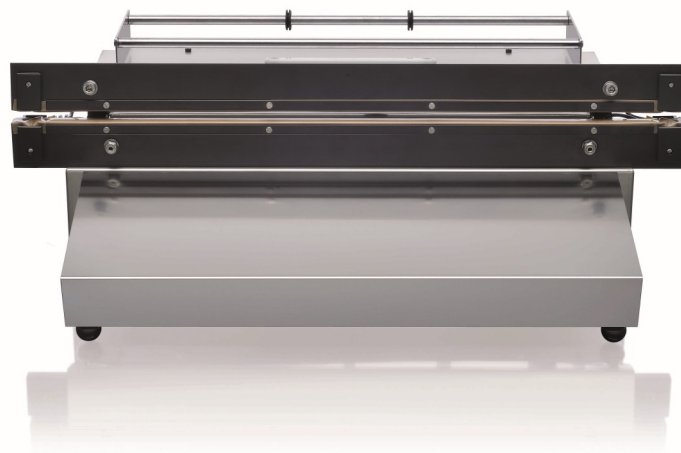

MH 460/610

Table top impulse sealer for high thickness poly bags or multilayered coated materials According to DIN 58953-7 Standards

Technical data
GENERAL FEATURES
Painted Steel frame
Stainless Steel AISI 304 cover
Adjustable free edge
SEALING
Impulse sealing
Kind of sealing—flat
Sealing width 8 mm
Sealing length 460/610 mm
Distance sealing-medical product mm ≥ 30 Din rules
HEAT SEALABLE MATERIALS
PE—PP
Multilayered coted materials
Header bags
Tyvek [®]
ISO 11607-2
11607-2 Validation (Digital Accutemp version)
PARAMETERS
Sealing time (sec.)
PRINTER
External
INTERFACES
RS232 port (Digital Accutemp version)

Technical data
CERTIFICATIONS/SAFETY
UNI EN 868-5:2009
DIN 58953-7
Directives 2006/42/EC—2014/30/EU-2014/35/EU
Manufactured in a UNI EN ISO 9001:2015 quality system certified company
FUNCTIONS
Microprocessor
Time setting
Energy saving
POWER SUPPLY
Power supply 100; 110/115; 230/240 VAC single phase
Multi frequency; Frequency 50/60 Hz
Max Power 1700 W
ACCESSORIES
Front Support Tray
Roll holder
SERVICES
Seal strength test EN 868-5
Maintenance
DIMENSIONS AND WEIGHTS
mm 560x360x220/710 x 220 x 360 - Kg 30/37

